

ARGENTA INOX SERIES

IP66 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP66 316L-INOX WALL-MOUNTING CABINET 600x400x200

Reference:

INX604020-316

Characteristics:

Product type:	316L Stainless steel wall-mounting cabinet
Dimensions cabinet:	(AxBxC) 600x400x200 mm
Installation:	Surface
Type of door:	Single opaque door
Locking:	5-mm double-bit painted zamak lock - Two 1-point lock
Finish:	Scotch 320 satin finish
Colour:	-
Mounting plate:	With flat mounting plate. 2-mm galvanised sheet steel
Weight (kg):	13,3
Materials:	AISI 316L stainless steel
Thickness:	Enclosure: 1,2 mm. Door: 1,2 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	
Capacity:	
Max. cabinet load:	225 kg
Max. mounting plate load:	200 kg
Max. door load:	25 kg

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	NEMA 1, 4, 4x, 12
Resistance to impact:	IK10
Ambient temperature range:	-25 °C / +60 °C
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	UL508A



Codes:


EAN:	8431044088815
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

ARGENTA INOX SERIES

IP66 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP66 316L-INOX WALL-MOUNTING CABINET 600x400x200

Reference: INX604020-316

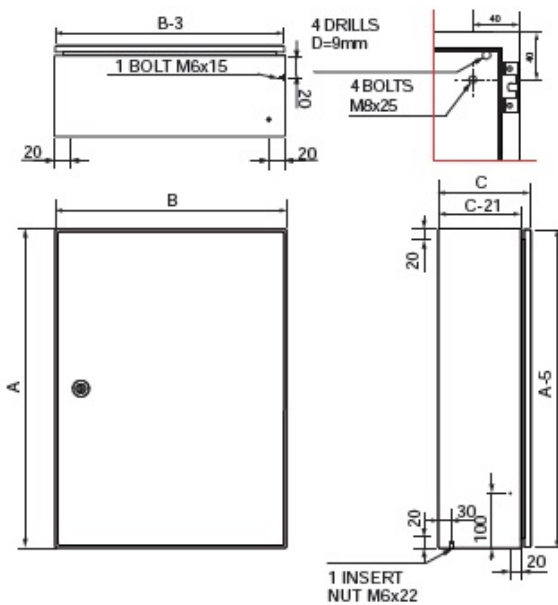

Standard drawing



Detailed drawing:  <http://www.ide.es/downloads/planos/pdf/INX604020-316.pdf>
 <http://www.ide.es/downloads/planos/dxf/INX604020-316.dxf>
 <http://www.ide.es/downloads/planos/stp/INX604020-316.stp>

Cable entry:	-	Body to be flush-fitted:	-
Wall fixing:	(HeightxWidth) 560x360 mm	Wall fixing material:	-
Inside usable space:	(HeightxWidthxD) 550x350x179 mm	Glass door with transparent panel:	-
No. Hinges:	2	Door profiles:	2

Sustainability:

RoHS - REACH

Supply:

Supplied in individual packaging containing cabinet, plate and accessory bag. The cabinet is protected by a plastic bag. Mounting plate is supplied unassembled inside the packaging.

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial environments and outdoor facilities with aggressive agents or saline environments. food, chemical and petrochemical industries, where a high degree of hygiene is required. Sea ports and areas with a high salt or chlorine concentration.