



## NB1-63H Miniature Circuit Breaker

### 1. General

#### 1.1 Function

protection of circuits against short-circuit currents,  
protection of circuits against overload currents,  
switch, isolation.

NB1-63H circuit-breakers are used in various places such as residential, industrial and commercial electrical distribution systems.

#### 1.2 Selection

Technical data of the network at the point considered:  
short-circuit current at the circuit-breaker installation point,  
which must always be less than the breaking capacity of  
this device, network normal voltage.

Tripping curves:

#### B curve

protection for people and big length cables in TN and IT systems.

#### C curve




protection for resistive and inductive loads with low inrush current.

#### D curve

protection for circuits which supply loads with high inrush current at the circuit closing  
(LV/LV transformers, breakdown lamps).

## 2. Technical data

### 2.1 curves

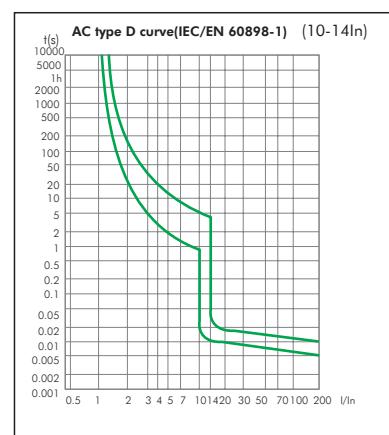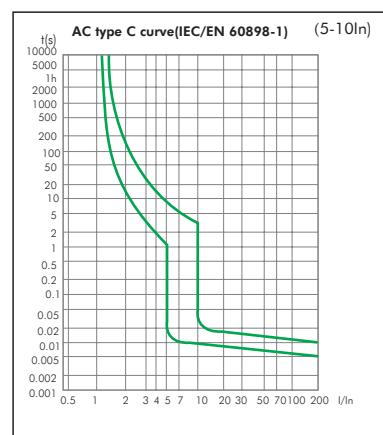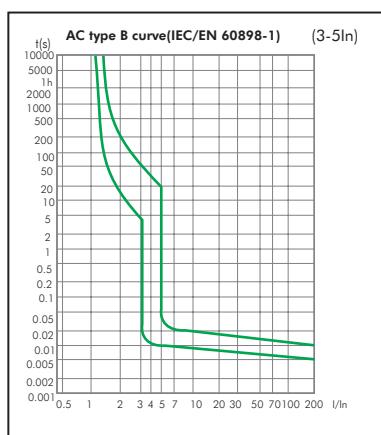

## 2.2

IEC/EN 60898-1		
Electrical features	Rated current In	A
	Poles	1P, 1P+N, 2P, 3P, 3P+N, 4P
	Rated voltage Ue	V
	Minimum voltage	V
	Rated frequency	50/60Hz
	Rated breaking capacity	A
	Energy limiting class	3
	Rated impulse withstand voltage(1.2/50) Uimp	V
	Dielectric test voltage at ind. Freq. for 1 min	kV
	Pollution degree	2
Power loss per pole	Rated current (A)	Max power loss per pole (W)
	1, 2, 3, 4, 5, 6, 10	3
	13, 16, 20, 25, 32	6
	40, 50, 63	13
	Thermo-magnetic release characteristic	B (3-5In) C (5-10In) D (10-14In)
Mechanical features	Electrical life	10, 000
	Mechanical life	20, 000
	Contact position indicator	Yes
	Protection degree	IP20
	Reference temperature for setting of thermal element	°C
Installation	Ambient temperature (with daily average≤35°C)	°C
	Storage temperature	°C
	Terminal connection type	Cable/U-type busbar/Pin-type busbar
	Terminal size top/bottom for cable	mm <sup>2</sup>
		AWG
Combination with accessories	Terminal size top/bottom for busbar	mm <sup>2</sup>
		AWG
	Tightening torque	N·m
		In-lbs.
	Mounting	On DIN rail EN 60715 (35mm) by means of fast clip device
Combination with accessories	Connection	From top and bottom
	Auxiliary contact	Yes
	Shunt release	Yes
	Under voltage release	Yes
	Alarm contact	Yes

## 2.3 Selectivity

	In (A)	Power supply side: RT36-00 (fuse)								
		20	25	36	50	63	80	100	125	160
		Is (kA)								
Load side: NB1-63H Curve B, C	≤2	1.2	4	> 12	> 12	> 12	> 12	> 12	> 12	> 12
	3	0.7	1.2	3.8	5.3	6	6	6	6	6
	4	0.6	0.9	2.5	3.8	6	6	6	6	6
	6	0.5	0.8	1.9	2.5	4.5	5	6	6	6
	10		0.7	1.4	2.2	3.2	3.6	6	6	6
	16			1.2	1.8	2.6	3	5.6	6	6
	20				1.5	2.2	2.5	4.6	6	6
	25				1.3	2	2.2	4.1	5.5	6
	32					1.7	1.9	3.8	4.5	6
	40						1.7	3	4	5
	50						1.5	2.6	3.5	4.5
	63							2.4	3.3	4.5

	In (A)	Power supply side: NM8-100S/H/R								
		16	20	25	32	40	50	63	80	100
		Is (kA)								
Load side: NB1-63H Curve B, C	≤10	0.19	0.19	0.3	0.4	0.5	0.5	0.5	0.63	0.8
	16			0.3	0.4	0.5	0.5	0.5	0.63	0.8
	20					0.5	0.5	0.5	0.63	0.8
	25						0.5	0.5	0.63	0.8
	32							0.5	0.63	0.8
	40								0.63	0.8
	50									0.8
	63									

## 2.4 Backup protection

	In (A)	Power supply side: RT16 series							
		40	50	63	80	100	125	160	
		Is (kA)							
Load side: NB1-63H Curve B, C	1~6	40	40	40	40	40	40	40	40
	8~10	40	40	40	40	40	40	40	40
	13	40	40	40	40	35	35	35	
	16	40	40	40	40	30	30	30	30
	20	40	40	40	40	30	30	30	30
	25	40	40	40	40	30	30	30	30
	32	40	40	40	40	30	30	30	30
	40	40	40	40	40	30	30	30	30
	50	30	30	30	30	30	30	30	30
	63	20	20	20	20	15	15	15	15

	In (A)	NM8-125S NM8-125H NM8-125R NM8-250S NM8-250H NM8-250R					
		Is (kA)					
		1~6	12	15	15	12	12
Load side: NB1-63H Curve B, C	10~20	12	15	15	12	12	12
	32~40	12	15	15	12	12	12
	50~60	12	15	15	12	12	12

### 2.5 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.

**The reference temperature is 30°C**

Ambient temperature(°C) ↓	-35	-30	-20	-10	0	10	20	30	40	50	60	70
Rated current(A)												
1	1.3	1.26	1.23	1.19	1.15	1.11	1.05	1	0.96	0.93	0.88	0.83
2	2.6	2.52	2.46	2.38	2.28	2.2	2.08	2	1.92	1.86	1.76	1.66
3	3.9	3.78	3.69	3.57	3.42	3.3	3.12	3	2.88	2.79	2.64	2.49
4	5.2	5.04	4.92	4.76	4.56	4.4	4.16	4	3.84	3.76	3.52	3.32
6	7.80	7.56	7.38	7.14	6.84	6.6	6.24	6	5.76	5.64	5.28	4.98
10	13.20	12.7	12.5	12	11.5	11.1	10.6	10	9.6	9.3	8.9	8.40
16	21.12	20.48	20	19.2	18.4	17.76	16.96	16	15.36	14.88	14.24	10.92
20	26.40	25.6	25	24	23	22.2	21.2	20	15.36	18.6	17.8	16.80
25	33	32	31.25	30	28.75	27.75	26.5	25	24	23.25	22.25	21
32	42.56	41.28	40	38.72	37.12	35.52	33.92	32	30.72	29.76	28.16	26.88
40	53.20	51.2	50	48	46.4	44.8	42.4	40	38.4	37.2	35.6	33.60
50	67	65.5	63	60.5	58	56	53	50	48	46.5	44	41.50
63	83.79	81.9	80.01	76.86	73.71	70.56	66.78	63	60.48	58.9	55.44	52.29

When several simultaneously operating circuit breakers are mounted side by side in a small enclosure, the temperature rise inside the enclosure causes a reduction in current rating.

You must then assign the rating (already derated if necessary according to ambient temperature) a downrating factor of 0.8.

### 3. Overall and mounting dimensions (mm)

