



Product designation	Power contactor		
Product type designation	BF195		
<b>Contact characteristics</b>			
Number of poles	Nr.	4	
Rated insulation voltage $U_i$ IEC/EN	V	1000	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$		A	275
Operational current $I_e$			
	AC-1 ( $\leq 40^\circ C$ )	A	275
	AC-1 ( $\leq 55^\circ C$ )	A	230
	AC-1 ( $\leq 70^\circ C$ )	A	200
	AC-3 ( $\leq 440V \leq 55^\circ C$ )	A	195
	AC-4 (400V)	A	95
Rated operational current AC-3 ( $T \leq 55^\circ C$ )			
	230V	A	195
	400V	A	195
	415V	A	195
	440V	A	195
	500V	A	184
	690V	A	165
	1000V	A	85
Rated operational power AC-1 ( $T \leq 40^\circ C$ )			
	230V	kW	104
	400V	kW	181
	500V	kW	199
	690V	kW	312
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 1 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	275
	110V	A	120
	220V	A	—
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 2 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	275
	110V	A	170
	220V	A	150
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 3 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	275

	110V	A	170
	220V	A	150
	330V	A	150
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	275
	110V	A	275
	220V	A	275
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	180
	110V	A	90
	220V	A	—
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	180
	110V	A	140
	220V	A	100
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	180
	110V	A	160
	220V	A	140
	330V	A	100
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	275
	48V	A	275
	75V	A	180
	110V	A	160
	220V	A	160
	330V	A	160
	460V	A	100
Short-time allowable current for 10s (IEC/EN60947-1)			A 1560
Protection fuse			
	gG (IEC)	A	315
	aM (IEC)	A	250
Making capacity (RMS value)			A 1658
Breaking capacity at voltage			
	440V	A	1658
	500V	A	1326
	690V	A	1377
Resistance per pole (average value)			$\text{m}\Omega$ 0.18
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	13
	AC-3	W	6.7
Tightening torque for terminals			
	min	Nm	18
	max	Nm	18
	min	I <sub>bin</sub>	159
	max	I <sub>bin</sub>	159

Tightening torque for coil terminal

	min	Nm	0.8
	max	Nm	1

Power terminal protection according to IEC/EN 60529 IP00

**Mechanical features**

Operating position

	normal allowable	Vertical plan ±30°
--	---------------------	-----------------------

Fixing

Weight	g	4000
--------	---	------

Operations

Mechanical life	cycles	10000000
-----------------	--------	----------

Electrical life

Electrical life	cycles	1000000
-----------------	--------	---------

**Safety related data**

Performance level B10d according to EN/ISO 13489-1

	rated load	cycles	1000000
	mechanical load	cycles	10000000

EMC compatibility

**AC coil operating**

Rated AC voltage at 50/60Hz, 60Hz

	min	V	100
	max	V	250

AC operating voltage

of 50/60Hz coil powered at 50Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max

drop-out	max	%Us	≤70 Us min
----------	-----	-----	------------

of 50/60Hz coil powered at 60Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max

drop-out	max	%Us	≤70 Us min
----------	-----	-----	------------

AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz			
	in-rush	VA	160...230
	holding	VA	1.5...3.0

of 50/60Hz coil powered at 60Hz			
	in-rush	VA	160...230
	holding	VA	1.5...3.0

of 60Hz coil powered at 60Hz			
	in-rush	VA	160...230
	holding	VA	1.5...3.0

Dissipation at holding ≤20°C 50Hz

W	1.5...3.0
---	-----------

**DC coil operating**


DC rated control voltage

	min	V	100
	max	V	250


DC operating voltage

pick-up	min	%Us	85 Us min
---------	-----	-----	-----------

	max	%Us	110	Us max
drop-out	max	%Us	≤70	Us min
Average coil consumption ≤20°C				
	in-rush	W	160...230	
	holding	W	1.5...3.0	
<b>Max cycles frequency</b>				
Mechanical operation		cycles/h	1000	
<b>Operating times</b>				
Average time for Us control in AC				
	Closing NO			
		min	ms	50
		max	ms	100
	Opening NO			
		min	ms	35
		max	ms	75
<b>UL technical data</b>				
Rated operational voltage AC (UL)		V	600	
Yielded mechanical performance for three-phase AC motor				
	200/208V	HP	60	
	220/240V	HP	75	
	460/480V	HP	150	
	575/600V	HP	150	
<b>General USE</b>				
Contactor		AC current	A	275
Short-circuit protection fuse, 600V High fault		Short circuit current Fuse rating Fuse class	kA A J	100 400 J
Standard fault		Short circuit current Fuse rating Fuse class	kA A RK5	10 400 RK5
<b>Ambient conditions</b>				
Temperature	Operating temperature		min °C	-40
			max °C	70
Storage temperature		min °C	-50	
		max °C	80	
Max altitude		m	3000	
<b>Resistance &amp; Protection</b>				
Pollution degree			3	
<b>Dimensions</b>				

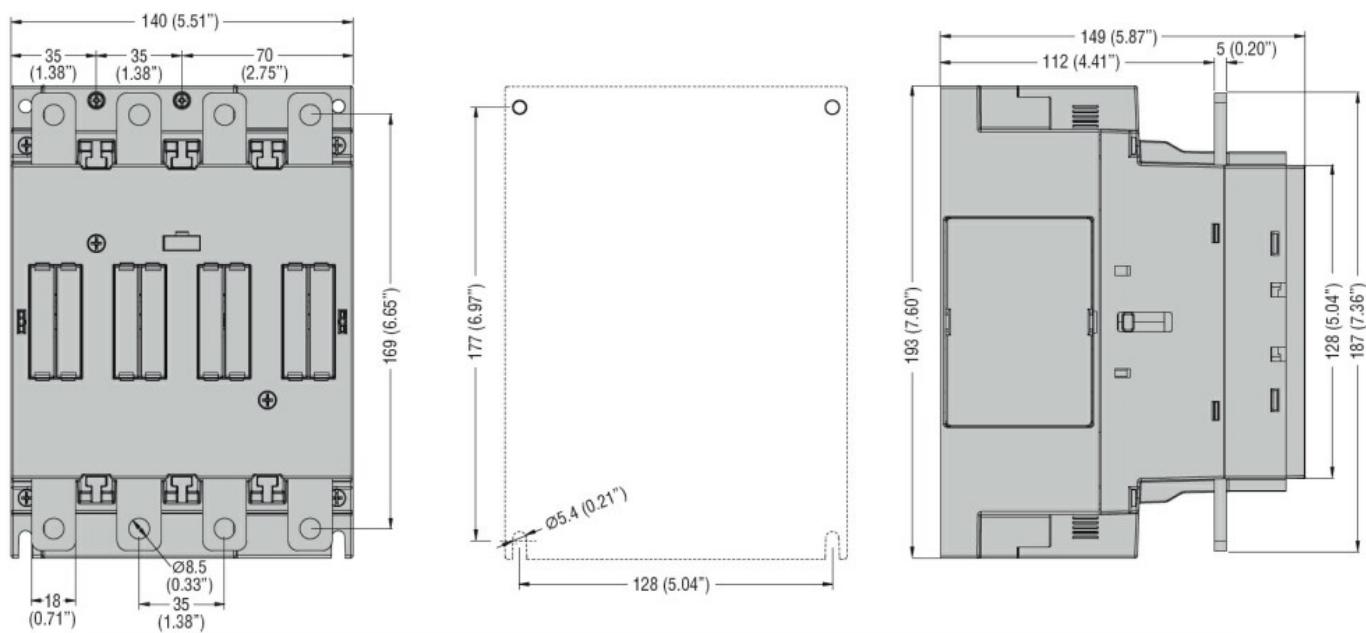

### Wiring diagrams

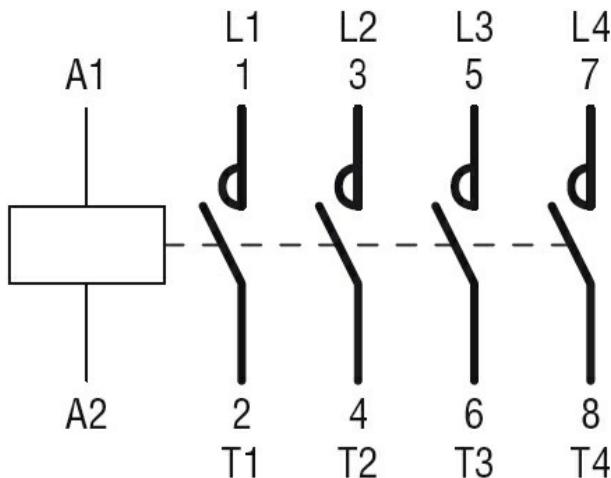

### Certifications and compliance

#### Compliance

- CSA C22.2 n° 60947-1
- CSA C22.2 n° 60947-4-1
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-4-1
- UL 60947-1
- UL 60947-4-1

#### Certificates

cULus

### ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching