# BF26500E230

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 265A, AC/DC COIL, 100...250VAC/DC



| | | | |
|---|---|---|---|
| Product designation | | | Power contactor |
| Product type designation | | | BF265 |
| **Contact characteristics** | | | |
| Number of poles | | Nr. | 3 |
| Rated insulation voltage Ui IEC/EN | | V | 1000 |
| Rated impulse withstand voltage Uimp | | kV | 8 |
| Operational frequency | | | |
| | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current Ith | | A | 450 |
| Operational current Ie | | | |
| | AC-1 (≤40°C) | A | 450 |
| | AC-1 (≤55°C) | A | 375 |
| | AC-1 (≤70°C) | A | 325 |
| | AC-3 (≤440V ≤55°C) | A | 265 |
| | AC-4 (400V) | A | 125 |
| Rated operational power AC-3 (T≤55°C) | | | |
| | 230V | kW | 75 |
| | 400V | kW | 132 |
| | 415V | kW | 132 |
| | 440V | kW | 160 |
| | 500V | kW | 160 |
| | 690V | kW | 200 |
| | 1000V | kW | 160 |
| Rated operational current AC-3 (T≤55°C) | | | |
| | 230V | A | 265 |
| | 400V | A | 265 |
| | 415V | A | 265 |
| | 440V | A | 265 |
| | 500V | A | 250 |
| | 690V | A | 250 |
| | 1000V | A | 115 |
| Rated operational power AC-1 (T≤40°C) | | | |
| | 230V | kW | 170 |
| | 400V | kW | 296 |
| | 500V | kW | 326 |
| | 690V | kW | 511 |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 1 poles in series | | | |
| | 75V | A | 350 |
| | 110V | A | 160 |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 2 poles in series | | | |
| | 75V | A | 350 |
| | 110V | A | 300 |
| | 220V | A | 250 |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 3 poles in series | | | |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | |
|---|---|---|---|
| | 75V | A | 350 |
| | 110V | A | 300 |
| | 220V | A | 300 |
| | 330V | A | 250 |
| IEC max current Ie in DC1 with L/R ≤ 1ms with 4 poles in series | | | |
| | 75V | A | 350 |
| | 110V | A | 300 |
| | 220V | A | 300 |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series | | | |
| | 75V | A | 280 |
| | 110V | A | 150 |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series | | | |
| | 75V | A | 280 |
| | 110V | A | 250 |
| | 220V | A | 200 |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series | | | |
| | 75V | A | 280 |
| | 110V | A | 280 |
| | 220V | A | 250 |
| | 330V | A | 200 |
| IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series | | | |
| | 75V | A | 280 |
| | 110V | A | 280 |
| | 220V | A | 280 |
| | 330V | A | 280 |
| | 460V | A | 200 |
| Short-time allowable current for 10s (IEC/EN60947-1) | | A | 2120 |
| Protection fuse | | | |
| | gG (IEC) | A | 630 |
| | aM (IEC) | A | 400 |
| Making capacity (RMS value) | | A | 2650 |
| Breaking capacity at voltage | | | |
| | 440V | A | 2120 |
| | 500V | A | 1792 |
| | 690V | A | 1624 |
| Resistance per pole (average value) | | mΩ | 0.12 |
| Power dissipation per pole (average value) | | | |
| | Ith | W | 24.3 |
| | AC-3 | W | 8.4 |
| Tightening torque for terminals | | | |
| | min | Nm | 35 |
| | max | Nm | 35 |
| | min | lbin | 310 |
| | max | lbin | 310 |
| Tightening torque for coil terminal | | | |
| | min | Nm | 0.8 |
| | max | Nm | 1 |
| Power terminal protection according to IEC/EN 60529 | | | IP00 |
| **Mechanical features** | | | |
| Operating position | | | |
| | normal | | Vertical plan |
| | allowable | | ±30° |
| Fixing | | | Screw |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | |
|---|---|---|---|---|
| **Operations** | | | | |
| Mechanical life | | | cycles | 5000000 |
| Electrical life | | | cycles | 900000 |
| **Safety related data** | | | | |
| Performance level B10d according to EN/ISO 13489-1 | | | | |
| | | rated load | cycles | 900000 |
| | | mechanical load | cycles | 5000000 |
| EMC compatibility | | | | yes |
| **AC coil operating** | | | | |
| Rated AC voltage at 50/60Hz, 60Hz | | | | |
| | | min | V | 100 |
| | | max | V | 250 |
| AC operating voltage | | | | |
| | of 50/60Hz coil powered at 50Hz | | | |
| | pick-up | | | |
| | | min | %Us | 80 Us min |
| | | max | %Us | 110 Us max |
| | drop-out | | | |
| | | max | %Us | ≤70 Us min |
| | of 50/60Hz coil powered at 60Hz | | | |
| | pick-up | | | |
| | | min | %Us | 80 Us min |
| | | max | %Us | 110 Us max |
| | drop-out | | | |
| | | max | %Us | ≤70 Us min |
| AC average coil consumption at 20°C | | | | |
| | of 50/60Hz coil powered at 50Hz | | | |
| | | in-rush | VA | 160…320 |
| | | holding | VA | 3.5…8.0 |
| | of 50/60Hz coil powered at 60Hz | | | |
| | | in-rush | VA | 160…320 |
| | | holding | VA | 3.5…8.0 |
| | of 60Hz coil powered at 60Hz | | | |
| | | in-rush | VA | 160…320 |
| | | holding | VA | 3.5…8.0 |
| Dissipation at holding ≤20°C 50Hz | | | W | 3.5…8.0 |
| **DC coil operating** | | | | |
| DC rated control voltage | | | | |
| | | min | V | 100 |
| | | max | V | 250 |
| DC operating voltage | | | | |
| | pick-up | | | |
| | | min | %Us | 85 Us min |
| | | max | %Us | 110 Us max |
| | drop-out | | | |
| | | max | %Us | ≤70 Us min |
| Average coil consumption ≤20°C | | | | |
| | | in-rush | W | 160…230 |
| | | holding | W | 3.5…8.0 |
| **Max cycles frequency** | | | | |
| Mechanical operation | | | cycles/h | 1000 |
| **Operating times** | | | | |
| Average time for Us control | | | | |

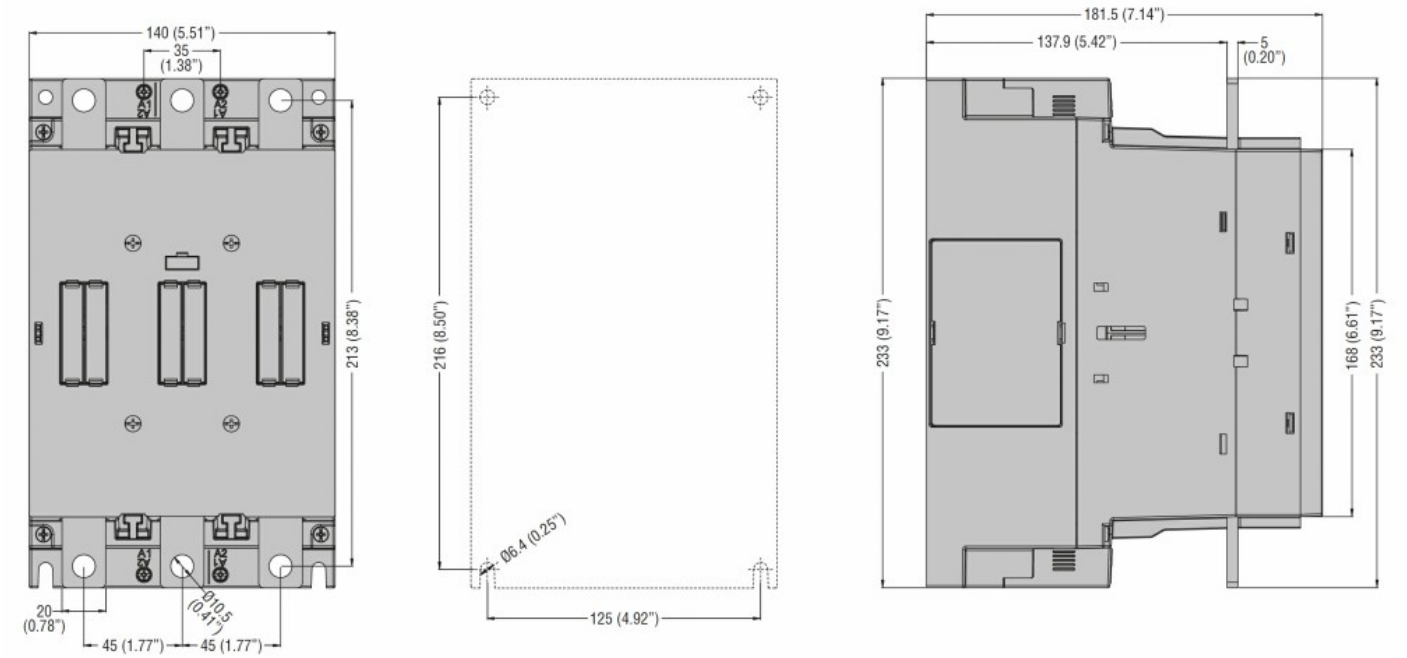

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

| | | | | | |
|---|---|---|---|---|---|
| | in AC | | | | |
| | | Closing NO | | | |
| | | | min | ms | 80 |
| | | | max | ms | 120 |
| | | Opening NO | | | |
| | | | min | ms | 30 |
| | | | max | ms | 75 |
| **UL technical data** | | | | | |
| Rated operational voltage AC (UL) | | | | V | 600 |
| Yielded mechanical performance | | | | | |
| | for three-phase AC motor | | | | |
| | | | 200/208V | HP | 75 |
| | | | 220/240V | HP | 100 |
| | | | 460/480V | HP | 200 |
| | | | 575/600V | HP | 250 |
| General USE | | | | | |
| | Contactor | | | | |
| | | | AC current | A | 450 |
| Short-circuit protection fuse, 600V | | | | | |
| | High fault | | | | |
| | | | Short circuit current | kA | 100 |
| | | | Fuse rating | A | 600 |
| | | | Fuse class | | J |
| | Standard fault | | | | |
| | | | Short circuit current | kA | 18 |
| | | | Fuse rating | A | 600 |
| | | | Fuse class | | RK5 |
| **Ambient conditions** | | | | | |
| Temperature | | | | | |
| | Operating temperature | | | | |
| | | | min | °C | -40 |
| | | | max | °C | 70 |
| | Storage temperature | | | | |
| | | | min | °C | -50 |
| | | | max | °C | 80 |
| Max altitude | | | | m | 3000 |
| **Resistance & Protection** | | | | | |
| Pollution degree | | | | | 3 |
| **Dimensions** | | | | | |

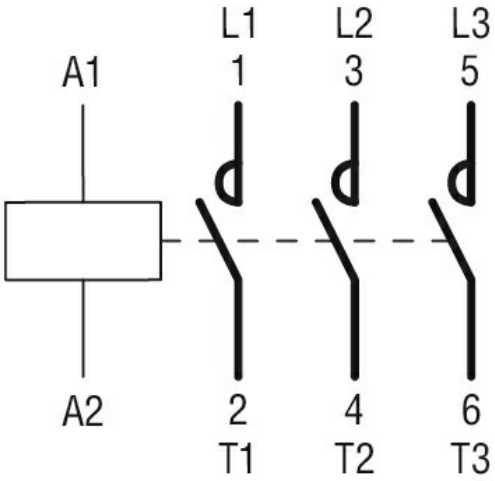

The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding

# BF26500E230

THREE-POLE CONTACTOR, IEC OPERATING CURRENT IE (AC3) = 265A, AC/DC COIL, 100...250VAC/DC




## Wiring diagrams




## Certifications and compliance

Compliance

| |
|---|
| CSA C22.2 n° 60947-1 |
| CSA C22.2 n° 60947-4-1 |
| IEC/EN/BS 60947-1 |
| IEC/EN/BS 60947-4-1 |
| UL 60947-1 |
| UL 60947-4-1 |

Certificates

cULus

## ETIM classification

| | |
|---|---|
| ETIM 8.0 | EC000066 - Power contactor, AC switching |


The characteristics described in this document are subject to updates or modifications at any time. The descriptions, technical and functional information, illustrations and instructions in this brochure are purely illustrative, and are consequently not contractually binding