



NB1-63H Miniature Circuit Breaker

1. General

1.1 Function

protection of circuits against short-circuit currents,
protection of circuits against overload currents,
switch,
isolation,

NB1-63H circuit-breakers are used in domestic installation,
as well as in commercial and industry electrical
distribution systems.

1.2 Selection

Technical data of the network at the point considered:
short-circuit current at the circuit-breaker installation point,
which must always be less than the breaking capacity of
this device,

Network normal voltage.

Tripping curves:

OV-curve (10-14In)


1.3 Operation of handle

The handle must always be operated fast, and from the middle.



2. Technical data

2.1 curves

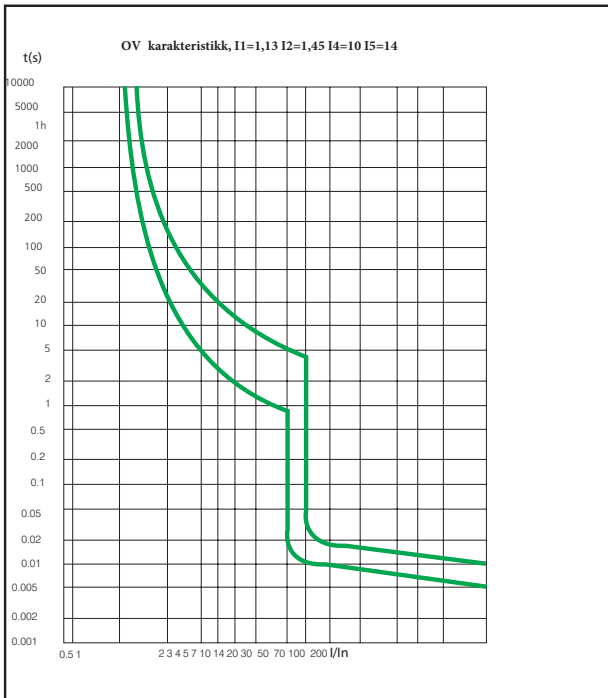

2.2

	Standard		IEC/EN 60898-1	
Electrical features	Rated current In	A	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63	
	Poles		1P, 1P+N, 2P, 3P, 3P+N, 4P	
	Rated voltage Ue	V	230/400~240/415	
	Insulation voltage Ui	V	500	
	Rated frequency		50/60Hz	
	Rated breaking capacity	A	10000	
	Energy limiting class		3	
	Rated impulse withstand voltage(1.2/50) Uimp	V	6000	
	Dielectric test voltage at ind. Freq. for 1 min	kV	2	
	Pollution degree		2	
	Power loss per pole		Rated current (A)	Max power loss per pole (W)
			1, 2, 3, 4, 5, 6, 10	2
			13, 16, 20, 25, 32	3.5
			40, 50, 63	5
	Thermo-magnetic release characteristic		OV	
Mechanical features	Electrical life		4,000	
	Mechanical life		20,000	
	Contact position indicator		Yes	
	Protection degree		IP20	
	Reference temperature for setting of thermal element	°C	30	
	Ambient temperature (with daily average ≤ 35°C)	°C	-5...+40(Special application please refer to P14 for temperature compensation correction)	
	Storage temperature	°C	-25...+70	
Installation	Terminal connection type		Cable/U-type busbar/Pin-type busbar	
	Terminal size top/bottom for cable	mm ²	1-25mm ² solid/stranded core. 1-16mm ² multi strand wire with end sleeve.	
		AWG	18-4	
	Terminal size top/bottom for busbar	mm ²	10	
		AWG	18-8	
	Tightening torque	N·m	2.5	
		In-lbs.	22	
Combination with accessories	Mounting		On DIN rail EN 60715 (35mm) by means of fast clip device	
	Connection		From top and bottom	
	Auxiliary contact		Yes	
	Shunt release		Yes	
	Under voltage release		Yes	
	Alarm contact		Yes	

2.5 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed.

The reference temperature is 30°C

Ambient temperature Rated current(A) ↓	-35°C	-30°C	-20°C	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C	70°C
1	1.30	1.26	1.23	1.19	1.15	1.11	1.05	1.00	0.96	0.93	0.88	0.83
2	2.60	2.52	2.46	2.38	2.28	2.20	2.08	2.00	1.92	1.86	1.76	1.66
3	3.90	3.78	3.69	3.57	3.42	3.30	3.12	3.00	2.88	2.79	2.64	2.49
4	5.20	5.04	4.92	4.76	4.56	4.40	4.16	4.00	3.84	3.76	3.52	3.32
6	7.80	7.56	7.38	7.14	6.84	6.60	6.24	6.00	5.76	5.64	5.28	4.98
10	13.20	12.70	12.50	12.00	11.50	11.10	10.60	10.00	9.60	9.30	8.90	8.40
16	21.12	20.48	20.00	19.20	18.40	17.76	16.96	16.00	15.36	14.88	14.24	13.44
20	26.40	25.60	25.00	24.00	23.00	22.20	21.20	20.00	19.20	18.60	17.80	16.8
25	33.00	32.00	31.25	30.00	28.75	27.75	26.50	25.00	24.00	23.25	22.25	21.00
32	42.56	41.28	40.00	38.72	37.12	35.52	33.92	32.00	30.72	29.76	28.16	26.88
40	53.20	51.20	50.00	48.00	46.40	44.80	42.40	40.00	38.40	37.20	35.60	33.6
50	67.00	65.50	63.00	60.50	58.00	56.00	53.00	50.00	48.00	46.50	44.00	41.50
63	83.79	81.90	80.01	76.86	73.71	70.56	66.78	63.00	60.48	58.90	55.44	52.29

When several simultaneously operating circuit breakers are mounted side by side in a small enclosure, the temperature rise inside the enclosure causes a reduction in current rating.

You must then assign the rating (already derated if necessary according to ambient temperature) a downrating factor of 0.8.

3. Overall and mounting dimensions (mm)

