

Art.-Nr.: 100250

## Datasheet



K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth  
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20  
office@k-electric-gmbh.de | www.k-electric-gmbh.de

### D02-Fuse links 400V AC / 250V DC, 50A

fuse insert for D0 fuse switchgear

- ✓ Fuse base for D0 according to IEC 60269
- ✓ For switch-fuse units according to IEC/EN 60947-3
- ✓ Low-loss design
- ✓ Design D02
- ✓ Indicator color: White
- ✓ Caps: silver-plated

Weight: 0,014 / Stk, VPE: 50

approved acc. to

IEC/EN 60269-1

IEC/EN 60269-3

DIN VDE 0636-3, DIN 49522

Operation by laymen is permissible according to IEC/EN 61439-3.



#### Elektrische Daten nach IEC

Bemessungsspannung

400V AC

250V DC

Bemessungsstrom

50 A

Abschaltvermögen

AC  $\cos\varphi = 0,1$

50 kA<sub>r.m.s.</sub>

DC $\tau = 15\text{ms}$

8 kA

Max. Verlustleistung  $P_n$

4W

#### Mechanical Data

Weight

13 g




Art.-Nr.: 100250

## Datasheet




**K'ELECTRIC GMBH** | Carl-Benz-Str. 7 | D-95448 Bayreuth  
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20  
office@k-electric-gmbh.de | www.k-electric-gmbh.de

### Dimensions

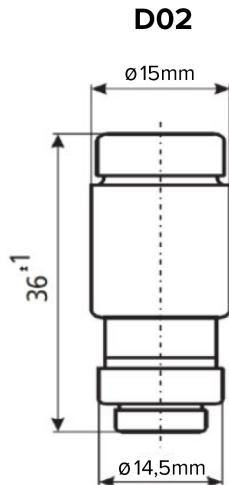

### Schaltbild

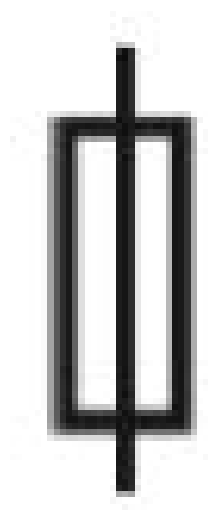


# Datasheet




**K'ELECTRIC GMBH** | Carl-Benz-Str. 7 | D-95448 Bayreuth  
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20  
office@k-electric-gmbh.de | www.k-electric-gmbh.de

## Characteristic curves

### Zeit-Strom-Kennlinie

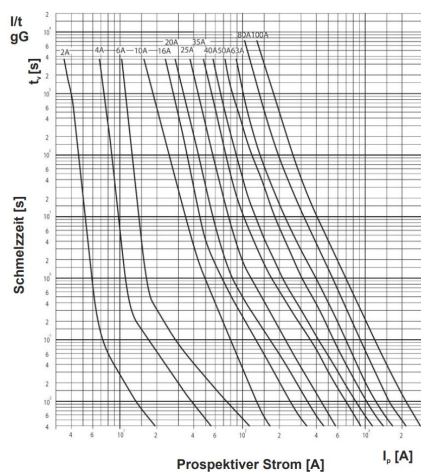

### Schmelzenergie-Kennlinie

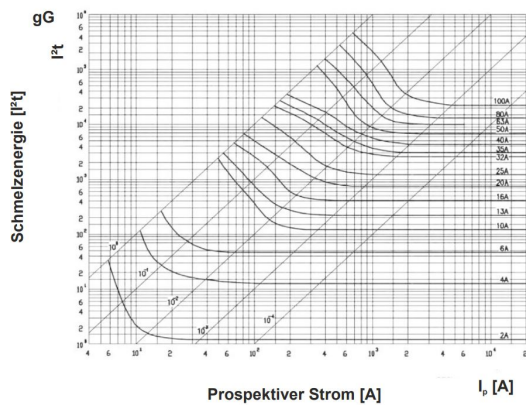

### Durchlass-Kennlinie

