

Art.-Nr.: 100216

Datasheet



K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
office@k-electric-gmbh.de | www.k-electric-gmbh.de

D01-Fuse links 400V AC / 250V DC, 16A

fuse insert for D0 fuse switchgear

- ✓ Fuse base for D0 according to IEC 60269
- ✓ For switch-fuse units according to IEC/EN 60947-3
- ✓ Low-loss design
- ✓ Design D01
- ✓ Indicator color: Gray
- ✓ Caps: galvanized

Weight: 0,007 / Stk, VPE: 50

approved acc. to

IEC/EN 60269-1

IEC/EN 60269-3

DIN VDE 0636-3, DIN 49522

Operation by laymen is permissible according to IEC/EN 61439-3.

Elektrische Daten nach IEC

Bemessungsspannung		400V AC
		250V DC
Bemessungsstrom		16 A
Abschaltvermögen	AC $\cos\varphi = 0,1$	50 kA _{r.m.s.}
	DC $\tau = 15\text{ms}$	8 KA
Max. Verlustleistung P_n		2,05 W

Mechanical Data

Weight	6 g
--------	-----




Art.-Nr.: 100216

Datasheet




K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
office@k-electric-gmbh.de | www.k-electric-gmbh.de

Dimensions

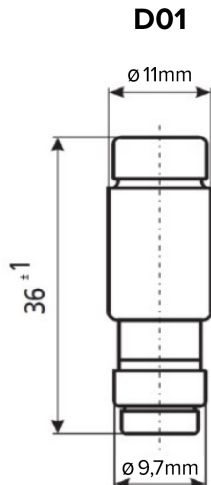

Schaltbild

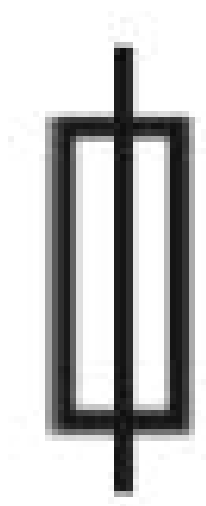


Datasheet




K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
office@k-electric-gmbh.de | www.k-electric-gmbh.de

Characteristic curves

Zeit-Strom-Kennlinie

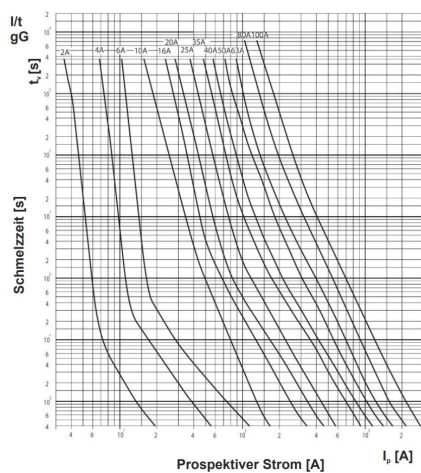

Schmelzenergie-Kennlinie

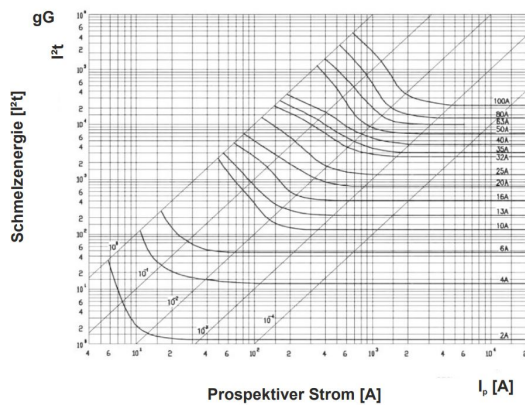

Durchlass-Kennlinie

