

Art.-Nr.: 100206

Datasheet



K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
office@k-electric-gmbh.de | www.k-electric-gmbh.de

D01-Fuse links 400V AC / 250V DC, 6A

fuse insert for D0 fuse switchgear

- ✓ Fuse base for D0 according to IEC 60269
- ✓ For switch-fuse units according to IEC/EN 60947-3
- ✓ Low-loss design
- ✓ Design D01
- ✓ Indicator color: Green
- ✓ Caps: galvanized

Weight: 0,006 / Stk, VPE: 50

approved acc. to

IEC/EN 60269-1

IEC/EN 60269-3

DIN VDE 0636-3, DIN 49522

Operation by laymen is permissible according to IEC/EN 61439-3.

Elektrische Daten nach IEC

Bemessungsspannung

400V AC

250V DC

Bemessungsstrom

6 A

Abschaltvermögen

AC $\cos\varphi = 0,1$

50 kA_{r.m.s.}

DC $\tau = 15\text{ms}$

8 KA

Max. Verlustleistung P_n

1,75 W

Mechanical Data

Weight

6 g




Art.-Nr.: 100206

Datasheet




K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
office@k-electric-gmbh.de | www.k-electric-gmbh.de

Dimensions

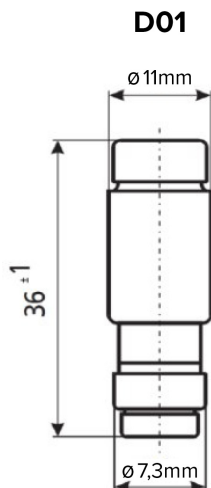

Schaltbild

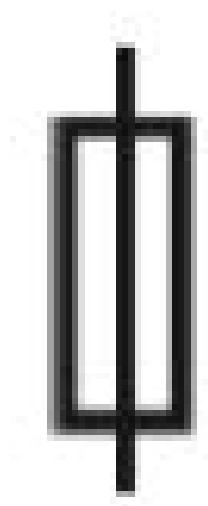

Art.-Nr.: 100206


Datasheet




K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
 Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
 office@k-electric-gmbh.de | www.k-electric-gmbh.de

Characteristic curves

Zeit-Strom-Kennlinie

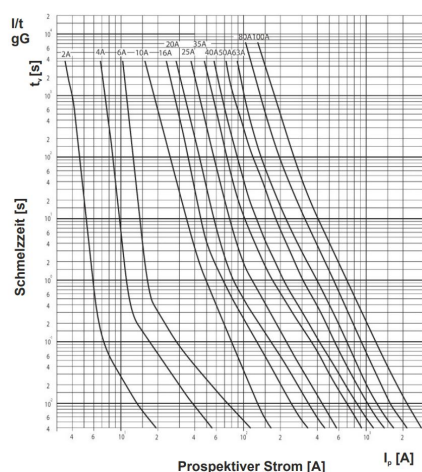

Durchlass-Kennlinie

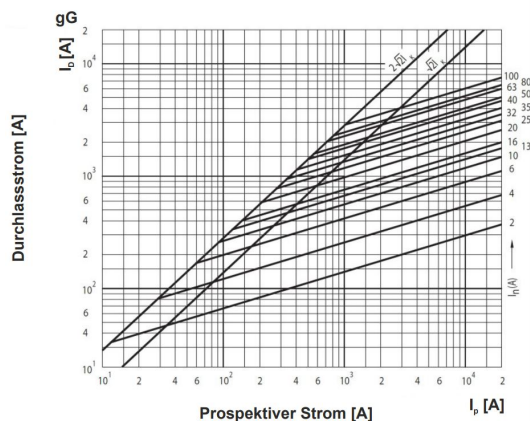

Schmelzenergie-Kennlinie

