

Art.-Nr.: 252691

Datasheet



K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
office@k-electric-gmbh.de | www.k-electric-gmbh.de

Cylindrical fuse 22X58 125A gL/gG

gG: gG

22 x 58 / 500V AC; 80kA: 22 x 58 / 500V AC; 80kA


- ✓ fuses with silver-plated or nickel-plated contacts
- ✓ steatite body with high resistance to internal pressure
- ✓ breaking capacity: 120 kA - 500V ~, 80 kA - 660V ~

Weight: 0,054 / Stk, VPE: 10

approved acc. to

UNE 21103, VDE 0636, ICE 60269-2, NFC 63210.

Dimensions

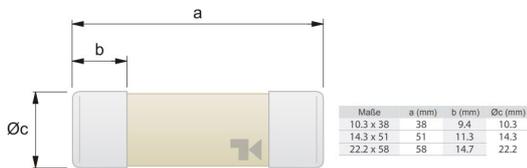

Art.-Nr.: 252691

Datasheet



K'ELECTRIC GMBH | Carl-Benz-Str. 7 | D-95448 Bayreuth
 Tel.: +49 921 151 26 78-0 | Fax: +49 921 151 26 78-20
 office@k-electric-gmbh.de | www.k-electric-gmbh.de

Characteristic curves

