

ARGENTA INOX SERIES

IP66 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP66 316L-INOX WALL-MOUNTING CABINET 1000x800x300

Reference:

INX1008030-316

Characteristics:

Product type:	316L Stainless steel wall-mounting cabinet
Dimensions cabinet:	(AxBxC) 1000x800x300 mm
Installation:	Surface
Type of door:	Single opaque door
Locking:	5-mm double-bit painted zamak lock - One 3-points lock
Finish:	Scotch 320 satin finish
Colour:	-
Mounting plate:	With flat mounting plate. 2-mm galvanised sheet steel
Weight (kg):	47,8
Materials:	AISI 316L stainless steel
Thickness:	Enclosure: 1,5 mm. Door: 1,5 mm.
Sealing gasket:	Injected polyurethane sealing gasket
Door material:	
Capacity:	
Max. cabinet load:	390 kg
Max. mounting plate load:	350 kg
Max. door load:	40 kg

Technical data:

Degree of protection:	IP66
NEMA degree of protection:	NEMA 1, 4, 4x, 12
Resistance to impact:	IK10
Ambient temperature range:	-25 °C / +60 °C
Maximum operating voltage:	1000 V AC / 1500 V DC

Certificates and standards:

Directive:	2014/35/EU
Standards:	IEC 62208, IEC 61439-1
Certificates:	UL508A



Codes:


EAN:	8431044088877
Customs tariff number:	85.38.10.00
ETIM 8.0:	EC000261

ARGENTA INOX SERIES

IP66 STAINLESS STEEL WALL-MOUNTING CABINETS

Description: IP66 316L-INOX WALL-MOUNTING CABINET 1000x800x300

Reference: INX1008030-316

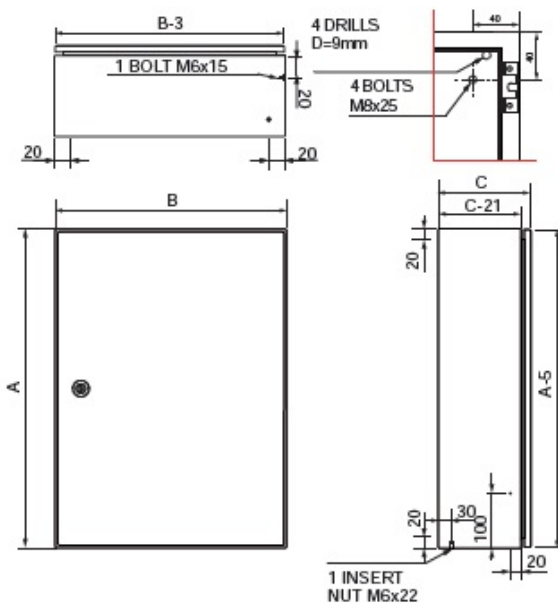

Standard drawing

Detailed drawing:

- <http://www.ide.es/downloads/planos/pdf/INX1008030-316.pdf>
- <http://www.ide.es/downloads/planos/dxf/INX1008030-316.dxf>
- <http://www.ide.es/downloads/planos/stp/INX1008030-316.stp>



Cable entry: -

Wall fixing: (HeightxWidth) 960x760 mm

Inside usable space: (HeightxWidthxDensity) 950x750x279 mm

No. Hinges: 3

Body to be flush-fitted: -

Wall fixing material: -

Glass door with transparent panel: -

Door profiles: 2

Sustainability:

RoHS - REACH

Supply:

Supplied in individual packaging containing cabinet, plate and accessory bag. The cabinet is protected by a plastic bag. Mounting plate is supplied assembled inside the cabinet.

Product end of life:

It does not require specific recycling operations.

Recommended applications:

Industrial environments and outdoor facilities with aggressive agents or saline environments. food, chemical and petrochemical industries, where a high degree of hygiene is required. Sea ports and areas with a high salt or chlorine concentration.