

ARGENTA SERIES

IP66 STEEL WALL-MOUNTING CABINETS

Reference: GN12012025 Description: IP66 ROLLED STEEL WALL-MOUNTING CABINET 1200x1200x250

OPAQUE DOOR

Characteristics:

Product type: Wall-mounting cabinet

Dimensions cabinet: (AxBxC) 1200x1200x250 mm

Installation: Surface

Type of door: Single opaque door

Locking: 5-mm double-bit lock - One 3-points lock

Finish: Coated with hardened polyester paint, embossed, 80-120 µ, with UV protection.

Colour: RAL 7035 grey

With flat mounting plate. 2-mm galvanised sheet steel Mounting plate:

Weight (Kg): 76.2

Cold-rolled steel EN10130+A1 Materials:

Injected polyurethane sealing gasket.

Technical data:

IP66 / NEMA 1, 12, 4 Degree of protection:

IK10 Resistance to impact:

-25 °C / +40 °C Ambient temperature range: 1000 V AC Maximum operating voltage: C4-M

Corrosion resistance:

Certificates and standards:

Directive: 2014/35/EU

Standards: UNE-EN 62208 / UNE-EN 61439-1-3 (as applicable).

Certificates: UL508A / Bureau Veritas












ARGENTA SERIES

IP66 STEEL WALL-MOUNTING CABINETS

Description: IP66 ROLLED STEEL WALL-MOUNTING CABINET 1200X1200X250 OPAQUE DOOR

Reference: GN12012025

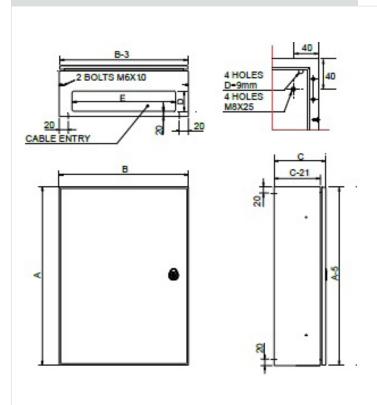



Pictures and drawings are standards. To get more details please surf www.ide.es to download those files (pdf, dxf, igs).

Dimensions cabinet: (AxBxC) 1200x1200x250 mm Cable entry: (DxE) 2x(140x500) mm

Body to be flush-fitted: - Wall fixing: (Height x Width) 1160x1160 mm

Inside usable space: (Height x Width x Depth) 1150x1150x229 mm

Sustainability:

RoHS - REACH

Supply:

Supplied in individual packaging containing cabinet, plate and accessory bag. Mounting plate is supplied assembled inside the cabinet.

Product end of life:

It does not require specific recycling operations.

Recommended applications

Industrial environments, manufacturing companies requiring a high degree of protection against dust, splashes and impacts.