



ENT Series

Low Voltage Current Transformers

ENT Series current transformers are narrow-profile devices to reduce line current to an acceptable level for measuring instruments. They also isolate and protect measuring instruments, relays and other meters from line voltage of an installation.

Series has wound type and bar primary type options according to areas of use. By means of sealable terminal covers, measurement is protected from fraud attempt.

- 5 A and 1 A secondary current options
- Thermal Class H (180 °C)
- Sealable secondary terminals (optional)
- Rail mounting for ENT.MN series
- Secondary output : 5A, 1A(Optional)











Product Code	Busbar Dimensions (mm)	Primary Current (A)	Nominal Power (VA)						Accuracy Class		Thermal Class
			1,5 VA	2,5 VA	5 VA	10 VA	15 VA	30 VA	0,5	1,0	H
ENT.AB	No Hole	5 - 10 - 15 - 20 - 25 - 30 - 40 - 50 - 60 - 75 - 80 - 100 - 125 - 150			•	•	•		•		•
ENT.A30	30x10	30 - 40 - 50 - 60 - 75 - 80 - 100 - 125 - 150			•	•	•		•	•	•
		200			•	•	•		•		•
ENT.A30.MN	30x10	250 - 300			•	•	•		•		•
		50 - 60 - 75	•						•		•
		80	•	•					•		•
		100 - 150	•	•					•		•
		200	•	•					•		•
ENT.A40	40x10	250 - 300		•	•				•		•
		400 - 500 - 600		•	•	•			•		•
ENT.A40.MN	40x10	300 - 400 - 500 - 600		•	•	•	•		•		•
ENT.A60	60x30	400 - 500 - 600		•	•	•			•		•
ENT.A80	80x25	750 - 800 - 1000 - 1200 - 1250				•	•		•		•
ENT.A100	100x50	1500 - 1600					•	•	•		•
		2000 - 2500 - 3000 - 3200						•	•		•
		4000 - 5000						•	•		•

*Class 0,5 current transformers can be supplied sealed optionally. Please specify this feature during ordering.



General Features	
Nominal Frequency	50-60 Hz
Insulation Test Voltage	3 kV AC, 1 min
Max. Operating Voltage	0,72 kV AC
Nominal Permanent Thermal Current	1,2 In
Thermal Short-Circuit Current, I _{th}	60 x I _n
Thermal Class	H (180°C)
Overcurrent Factor	n < 5
Type of Enclosure	Self-extinguishing plastic
Secondary Sealable Terminals	Yes
Area of Use	Indoor
Operating Temperature	-5°C ... +40°C
Standards	EN 61869-2

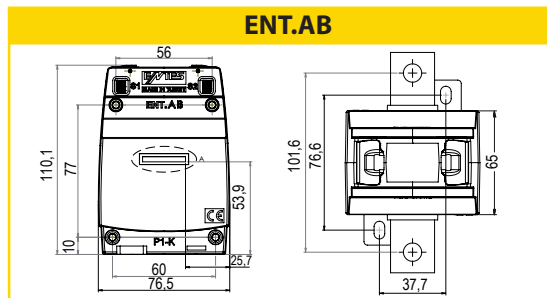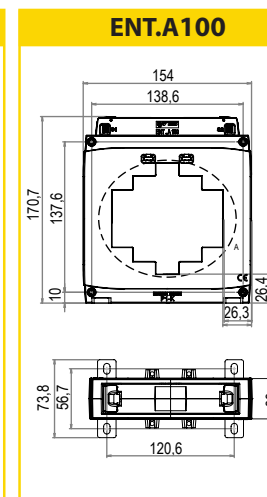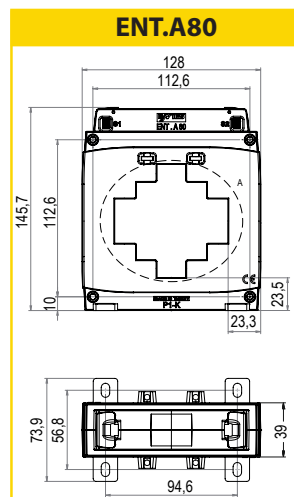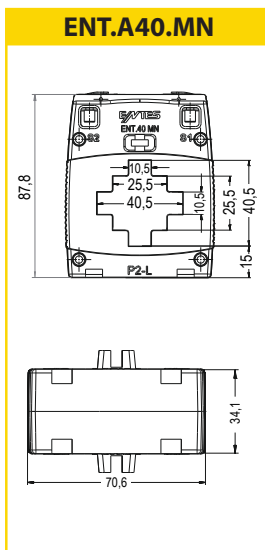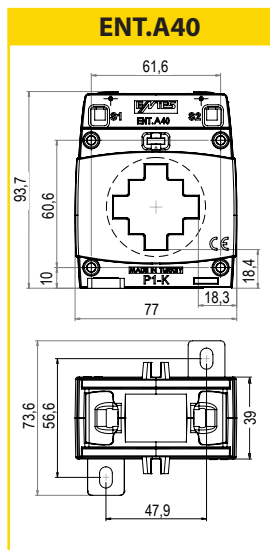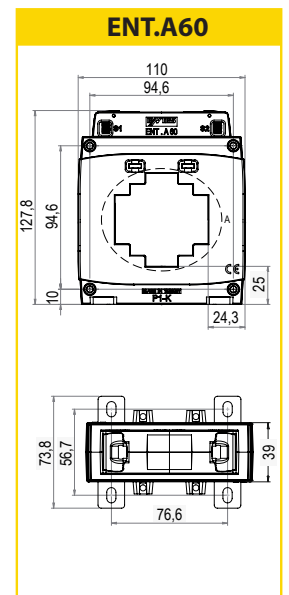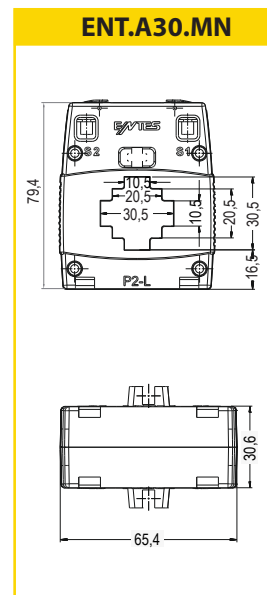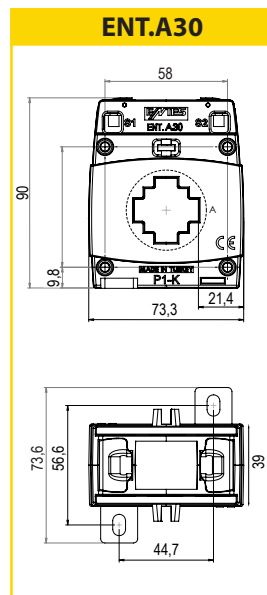

HEADQUARTERS

Address: Dudullu OSB; 1. Cadde; No: 23 34776 Umraniye - ISTANBUL / TURKEY Tel: +90 216 313 01 10 Fax: +90 216 314 16 15 Sales Fax: +90 216 365 71 71
E-mail: contact@entes.eu Web: www.entes.com.tr E-bulletin membership: ebulten@entes.com.tr Coordinates: 40,995852 N, 29,178398 E

INTERNATIONAL BRANCH OFFICES

İSTANBUL : contact@entes.eu Tel: +90 216 313 01 10 Fax: +90 216 314 16 15
INDIA : contact@entes.in Tel: +91 981 - 2980004
GREECE : contact@entes.eu Tel: +30 2310 706999 +30 2310 707296
GERMANY : kontakt@enteselektronik.com Tel: +49(0) 7022-931992-0

© ENTES Elektronik Cihazlar İmalat ve Ticaret A.Ş.

