





General characteristics	
Reset mode	Manual
Mechanical features	
Fixing	Direct mounting on BF40... BF94...
Dimensions	

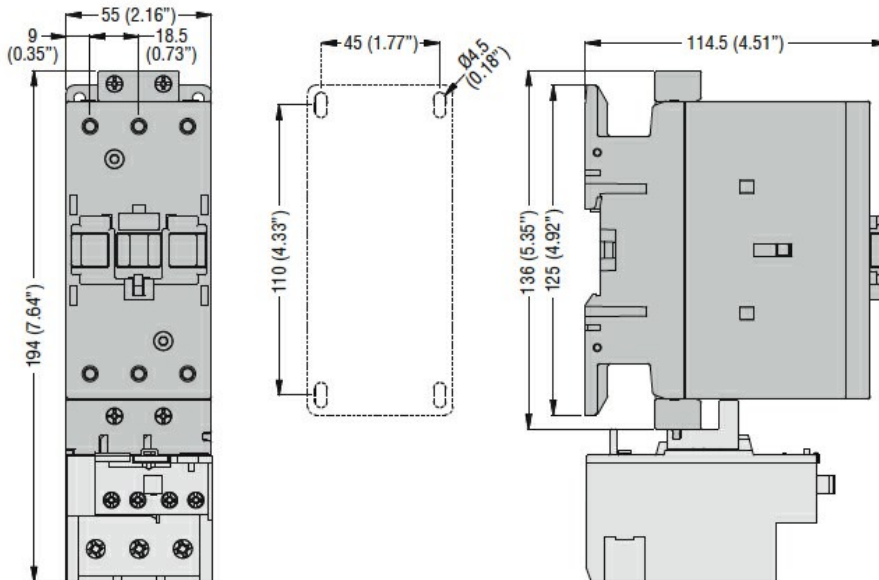

Wiring diagrams

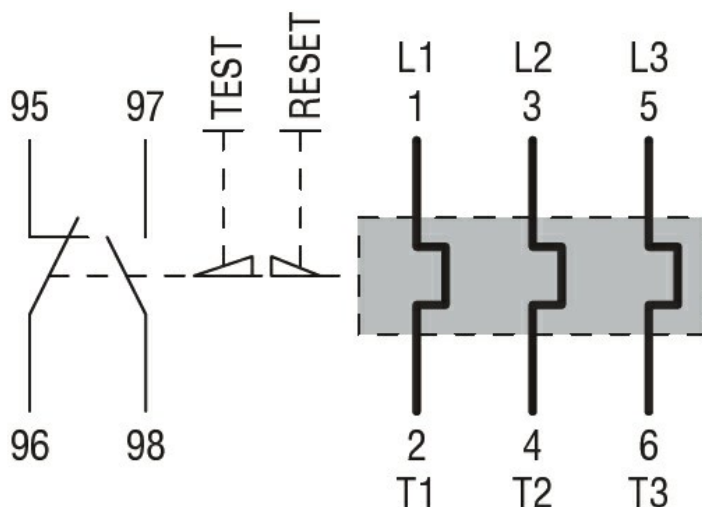

Certifications and compliance

Compliance	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-4-1

Motor protection relay, non phase failure/non single-phase sensitive. Three-pole (three-phase), manual resetting. Direct mounting on BF40 - BF94 contactors, 70...95A

UL508

Certifications

CCC

cULus

EAC