

DISTRIBUTION BLOCK **CENIKA**

DISTRIBUTION BLOCK 160A - 400A

APPLICATIONS :

Distribution block for mounting on DIN rail (35mm) for copper conductors



SPECIFICATION :

Type	160A	250A	400A
Colour	Grey	Grey	Grey
Maximum temperature [°C]	Max 80 °C	Max 80 °C	Max 80 °C
Nominal current A	Cu 160 A	Cu 250A	Cu 400A
Nominal insulation voltage V	690 V	690 V	690 V
Tightening torque Nm IN	12 Nm	19 Nm	25 Nm
Tightening torque Nm OUT	25 - 35 mm ² = 3.5 Nm		
	2.5 - 16 mm ² = 2 Nm		


CENIKA AS

Vebjørnsvei 5, N-3414 Lierstranda, Norway


Phone.:+47 32 24 03 00 - Fax :+47 32 24 03 01 - post@cenika.no - www.cenika.no

DISTRIBUTION BLOCK 160A - 400A

DIMENSION :

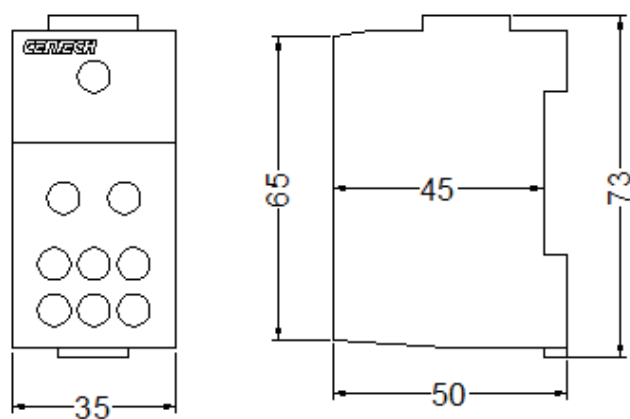

160A

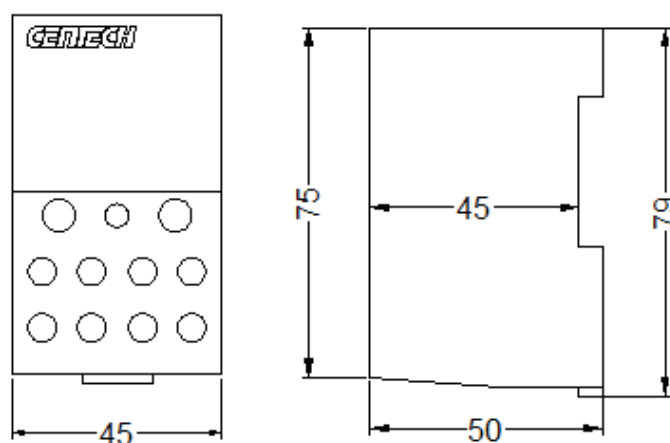

250A - 400A

PRODUCT :

CV2080701	DISTRIBUTION BLOCK GREY 400A CU IN 1X95-185 OUT 2X35 5X16 4X10
CV2080702	DISTRIBUTION BLOCK GREY 250A CU IN 1X35-120 OUT 2X35 5X16 4X10
CV2080703	DISTRIBUTION BLOCK GREY 160A CU IN 1X10-70 OUT 6X2,5-16

CENIKA AS

Vebjørnsvei 5, N-3414 Lierstranda, Norway

Phone.:+47 32 24 03 00 - Fax :+47 32 24 03 01 - post@cenika.no - www.cenika.no