



NB310L Residual Current Operated Circuit Breaker with over-current protection (Magnetic)

1. General

1.1 Function

Personnel and fire protection: Cable and line protection against overload and short-circuits.

1.2 Selection

Rated residual operating current

$I\Delta n = 30 \text{ mA}$: additional protection in the case of direct contact.

Tripping class

A and AC class

A class tripping is ensured for sinusoidal, alternating residual currents as well as for pulsed DC residual currents, whether they be quickly or slowly increase.

AC class tripping is ensured for sinusoidal, alternating residual currents, whether they be quickly or slowly increase.

Tripping curve

B curve (3 In-5 In) protection and control of the circuits against overloads and short-circuits; protection for people and big length cables in TN and IT systems.

C curve (5 In-10 In) protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

1.3 Approvals and certificates

CE/CB/KEMA

1.4 Add-on devices

XF9 auxiliary contacts

S9 shunt release



V9 under voltage release

OVT-1 over voltage release



2. Technical data

2.1 Curves

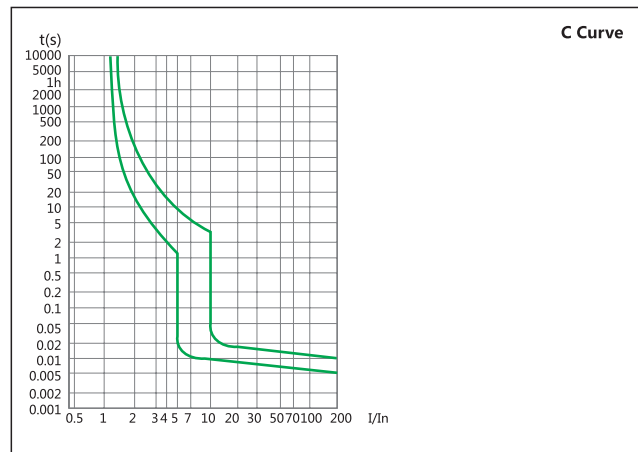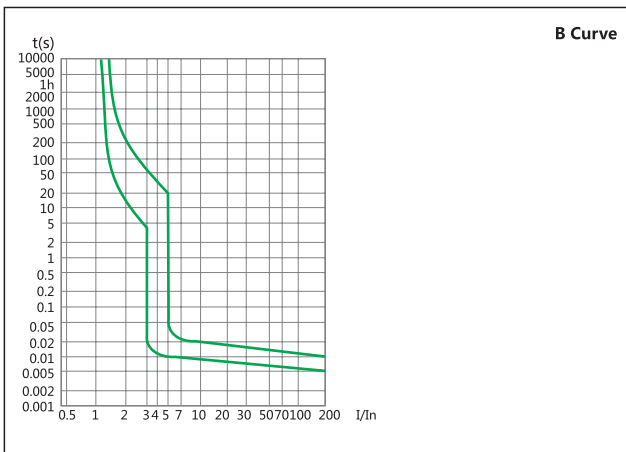

2.2


Standard		IEC/EN 61009-1		
Electrical features	Type (wave form of the earth leakage sensed)		A, AC	
	Thermo-magnetic release characteristic		B, C	
	Rated current I _n	A	6, 10, 13, 16, 20, 25, 32	6, 10, 13, 16, 20, 25, 32, 40
	Poles		2P	3P+N
	Rated voltage U _e	V	230/240	230/400
	Rated sensitivity I _{Δn}	A	0.03	
	Rated residual making and breaking capacity I _{Δm}	A	3,000	
	Rated short-circuit capacity I _{cn}	A	6,000	
	Break time under I _{Δn}	S	≤0.1	
	Rated frequency	Hz	50/60	
	Rated impulse withstand voltage (1.2/50)U _{imp}	V	6,000	4,000
	Dielectric TEST voltage at ind. Freq. for 1min	kV	2	
	Insulation voltage U _i		500	
	Pollution degree		2	
Mechanical features	Electrical life		2,000	
	Mechanical life		2,000	10,000
	Contact position indicator		Yes	
	Protection degree		IP20	
	Ambient temperature (with daily average ≤35°C)	°C	-25...+40	
	Storage temperature	°C	-25...+70	
Installation	Terminal connection type		Cable/U-type busbar/Pin-type busbar	
	Terminal size top/bottom for cable	mm ²	1-25mm ² solid/stranded core. 1-16mm ² multi strand wire with end sleeve.	
		AWG	18-5	
	Terminal size top/bottom for busbar	mm ²	10	
		AWG	18-8	
	Tightening torque	N-m	2	
		In-lbs.	18	
Mounting		On DIN rail EN 60715 (35mm) by means of fast clip device		
Connection		From top and bottom		

2.3 Temperature derating

The maximum permissible current in a circuit breaker depends on the ambient temperature where the circuit breaker is placed. Ambient temperature is the temperature inside the enclosure or switchboard in which the circuit breakers are installed. **The reference temperature is 30°C**

Temperature	-10°C	0°C	10°C	20°C	30°C	40°C	50°C	60°C
Temperature compensation coefficient of rated current	1.20	1.15	1.10	1.05	1.00	0.95	0.90	0.85








3. Overall and mounting dimensions (mm)

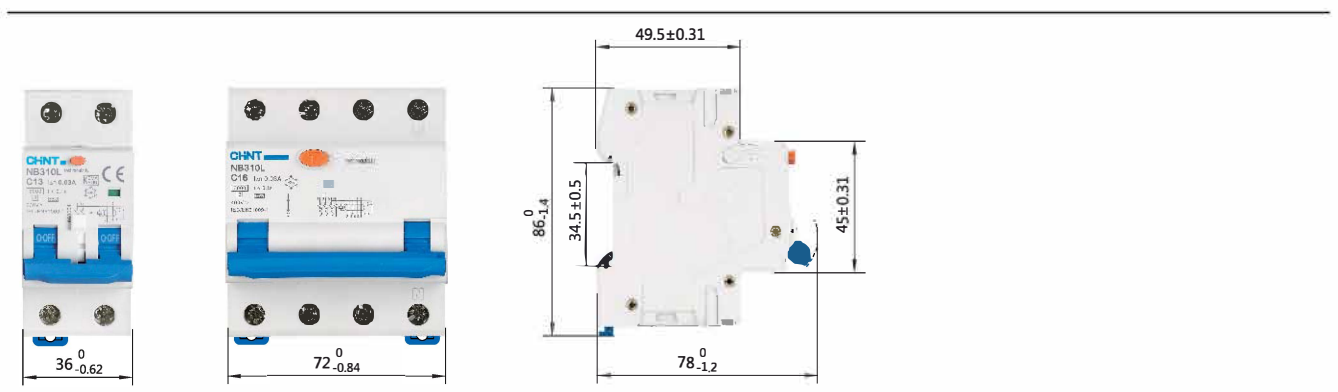



I1 = nedre (minste) prøvestrøm, den største strømmen vernet skal tåle i en bestemt tid uten å løse ut (normalt en time)
 I2 = øvre (største) prøvestrøm, den minste strømmen som garanterer at vernet løser ut innen en bestemt tid (normalt en time)
 I4 = største strøm som ikke fører til elektromagnetisk utkobling (<0,1 sekunder) (startstrøm)
 I5 = minste strøm som garanterer elektromagnetisk utkobling (<0,1 sekunder) (kortslutning)

Kurver for Chint modulært materiell

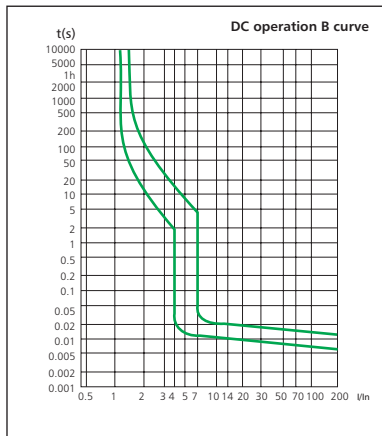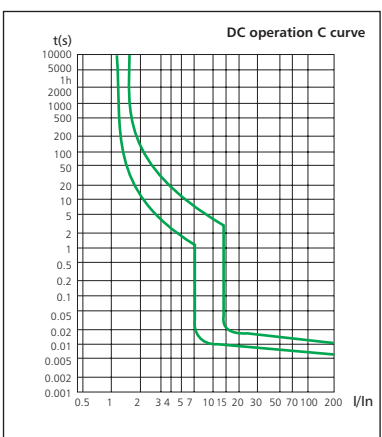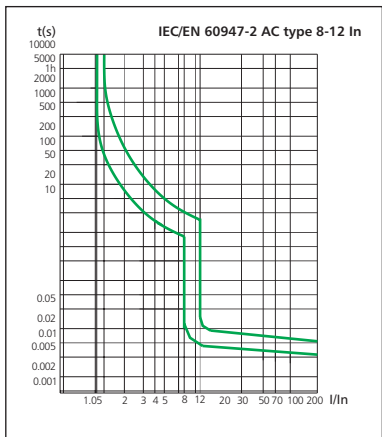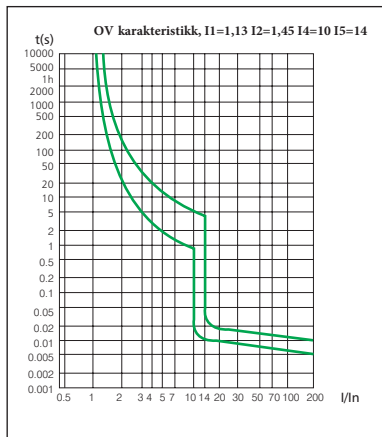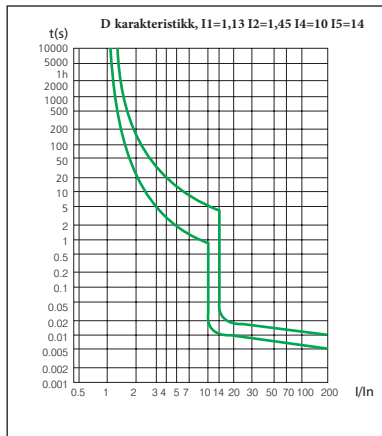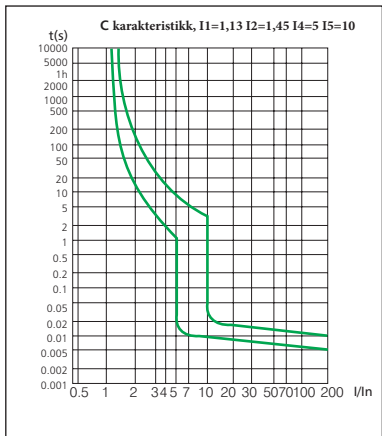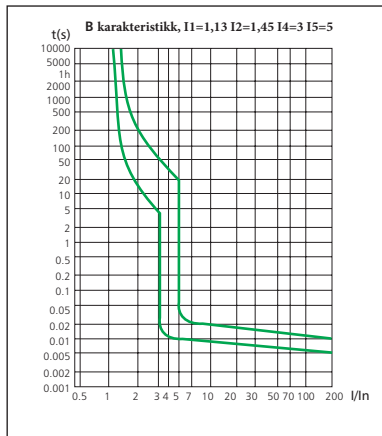

K-Karakteristikk for NB1L og NB310L, I1=1,05 I2=1,3 I4=5 og I5=10

