
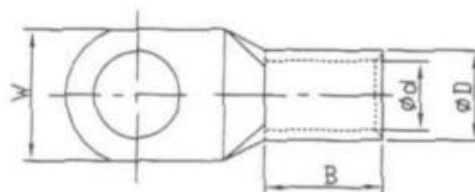


Presskabelsko



- Kabelskoene er laget med ledende, fortinnet, glødet kobber
- Driftstemperatur: -55°C til 155°C
- IEC EN 61238-1

Artikkel	Dimensjoner(mm)				
	$\varnothing E$	$\varnothing d$	W	B	L
16-6	6.5	5.4	12.0	12.0	30.0
16-8	8.4	5.4	12.5	12.0	30.0
16-10	10.5	5.4	16.0	12.0	33.0
25-8	8.4	6.8	15.0	12.0	35.0
25-10	10.5	6.8	18.0	12.0	35.0
35-8	8.4	8.2	16.0	14.0	38.0
35-10	10.5	8.2	18.0	14.0	39.0
50-8	8.4	9.5	17.8	16.0	45.0
50-10	10.5	9.5	17.8	16.0	45.0
70-8	8.4	11.2	21.0	20.0	49.0
70-10	10.5	11.2	21.0	20.0	49.0
95-10	10.5	13.5	25.0	23.0	55.0
120-10	10.5	15.0	27.5	22.0	60.0
150-10	10.5	16.5	30.0	26.0	70.0
185-10	10.5	18.5	33.5	32.0	75.0
240-12	13.0	21.0	38.0	38.0	90.0
300-12	13.0	23.5	43.0	42.0	98.0