


Combination type – CLASS I+II (Clearap)


B12.5VT-385V-FS-3P (CV067539)



Outside drawing

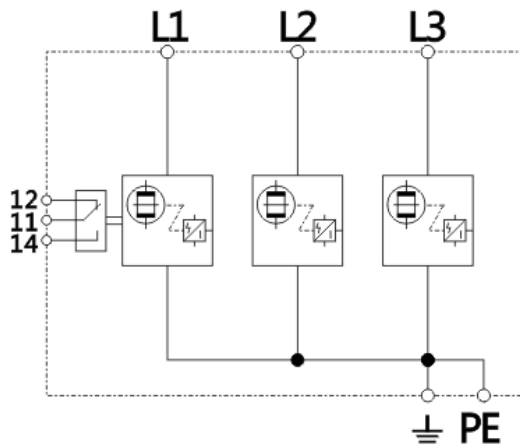

Basic circuit diagram

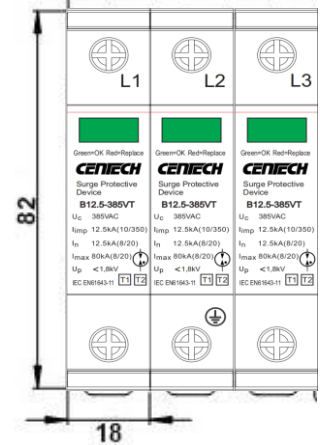

Dimension drawing

Type 1+2 surge arrester designed for low-voltage power supply system protection against surges at the boundaries from lightning protection zone 0_B -2 and higher.

- Class I+II/B+C SPD in accordance with IEC61643-11 and UL1449-4th
- High surge capacity of 12.5kA 10/350 per pole and I_{max} 80kA 8/20
- Reliable supervision due to disconnection device
- Fault indication by red indication flag in window
- With remote alarm terminal optional

Part No.	B12.5VT-385V-FS/3P	
In accordance with	IEC61643-11:2011; UL1449-4th	
Category IEC/VDE	I+ II / B+C	
Max. continuous operating voltage U _c	385VAC	
Nominal discharge current(8/20) I _n	12.5kA	
Max. discharge current(8/20) I _{max}	80kA	
Lightning impulse current(10/350) I _{imp}	12.5kA	
Voltage protection level @ I _n	<1.8kV	
Voltage protection level @ I _n =5kA	<0,4kV	
Response time	≤100 ns	
Follow current	No	
Backup fuse(only required if not already provided in mains)	125A gL/gG	
Operating temperature range	- 40°C ~ + 80°C	
Cross-section of connection wire	Single-strand 35mm ² ; multi-strand 25mm ²	
Torque applied by the screws	2.0-2.5 Nm	
Mounting	35mm DIN-rail in accordance with EN 50022/DIN46277-3	
Enclosure material	thermoplastic; extinguishing degree UL94 V-0	
Housing protection level	IP20	
Installation width	3 modules, DIN 43880	
Thermal disconnector	Internal green – normal ; red - failure	
Remote alarm contact	Yes	
Additional data for Remote Alarm Contacts	Closed and open 1.5mm ² / 0.5 Nm ,max	
Remote alarm contact type	Isolated Form C	
Switching capability Un/In	AC: 250V/0.5A DC: 250V/0.1A; 125V/0.2A; 75V/0.5A	
Max. Size of connecting wire	Max. 1.5mm ² (or # 16AWG)	